


T18-2VNLP-Q8


Photoelectric Sensor – Retroreflective Sensor with Polarizing Filter

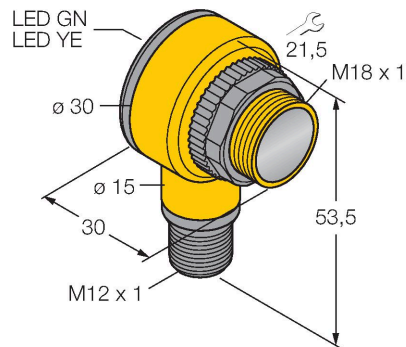

Features

- M12 × 1 male connector, 4-pin
- Protection classes IP67/IP69K
- Ambient temperature: -40 °C...+70 °C
- Operating voltage: 10...30 VDC
- NPN switching output, light and dark operation

Wiring diagram



Technical data

Type	T18-2VNLP-Q8
ID	3802625
Optical data	
Function	Retroreflective Sensor
Operating mode	Polarized
Reflector included in delivery	no
Light type	Red polarized
Wavelength	624 nm
Range	0...5500 mm
Electrical data	
Operating voltage	10...30 VDC
No-load current	≤ 25 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	Complementary contact, NPN
Readiness delay	≤ 500 ms
Response time typical	< 1.5 ms
Overcurrent release	> 220 mA
Mechanical data	
Design	Tube, T18
Dimensions	30 x 30 x 54 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Connector, M12 × 1
Number of cores	4
Ambient temperature	-40...+70 °C

Functional principle

Retro-reflective sensors incorporate emitter and receiver in a single compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors have a high function gain and good contrast performance. Further it is merely required to install and wire a single device.

Excess gain curve
Excess gain in relation to the distance

Technical data

Protection class	IP67 IP68 IP69
Special features	Chemical-resistant Encapsulated Wash down Resistant to chemicals
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED
Alarm display	LED yellow Flashing
Tests/approvals	
Approvals	CE, UL, CSA

Accessories

SMB1815SF3053279

Mounting bracket, PBT black, for PICO-GUARD points

SMB18A3033200

Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

SMB18FM3079421


mounting bracket, black, M22 x1.5 mm, male thread, female thread M18 x 1, for sensors with 18 mm thread

SMBAMS18P3073134

Mounting bracket, stainless steel, for sensors with 18 mm thread

Accessories

Dimension drawing	Type	ID	
Technical drawing of the connection cable RKC4.4T-2/TEL, showing dimensions and connector details.	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

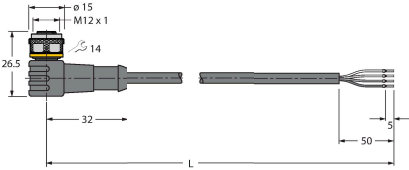Dimension drawing	Type	ID	
	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com