


T18AP6LPQ

Photoelectric Sensor

Features



- M12 × 1 male connector, 4-pin
- Protection classes IP67/IP69K
- Ambient temperature: -40 °C...+70 °C

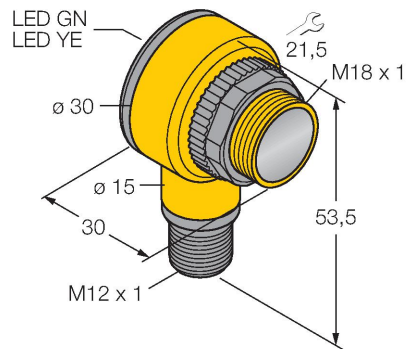

Technical data

Type	T18AP6LPQ
ID	3050560
Mechanical data	
Design	Rectangular with thread, T18
Dimensions	30 x 30 x 54 mm
Housing material	Plastic, PBT
Lens	plastic
Electrical connection	Connector, M12 × 1
Ambient temperature	-40...+70 °C
Protection class	IP67 IP69K
Special features	Wash down
Approvals	CE, UL, CSA

Accessories

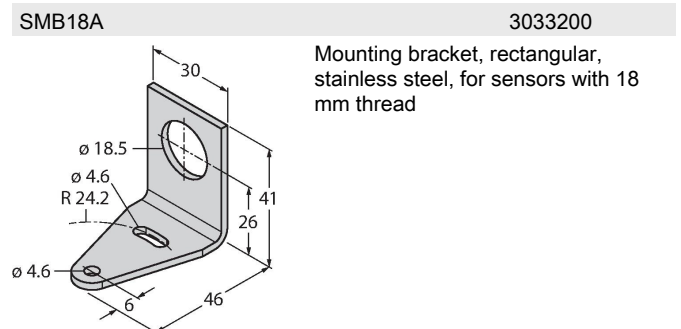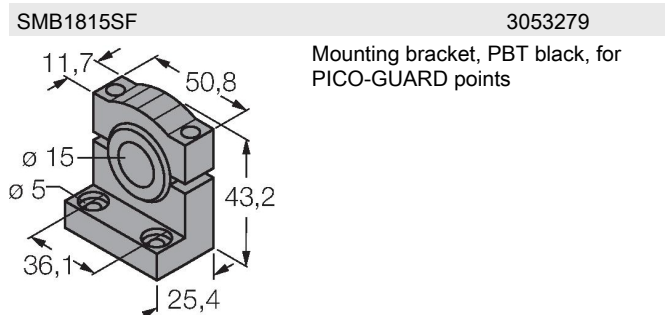

SMB18FM


3079421

mounting bracket, black, M22 x1.5 mm, male thread, female thread M18 x 1, for sensors with 18 mm thread


SMBAMS18P

3073134

Mounting bracket, stainless steel, for sensors with 18 mm thread



Accessories

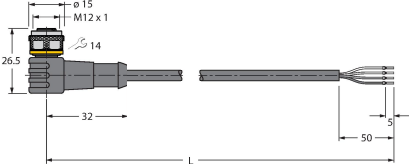Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com