


T18S2P6LPQ


Photoelectric Sensor – Retroreflective Sensor with Polarizing Filter

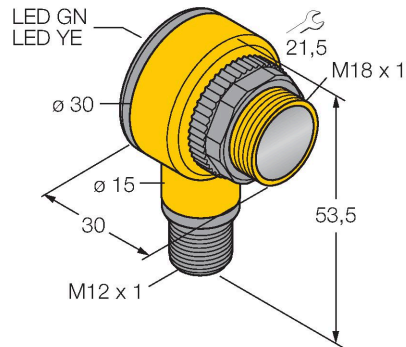

Features


- M12 × 1 male connector, 4-pin
- Protection classes IP67/IP69K
- Ambient temperature: -40 °C...+70 °C
- Selectable light/dark operation or light operation with alarm function
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram

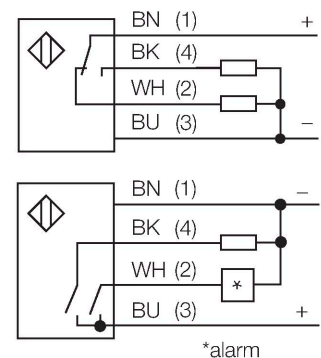

Functional principle

Retro-reflective sensors incorporate emitter and receiver in a single compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors have a high function gain and good contrast performance. Further it is merely required to install and wire a single device. Excess gain curve Excess gain in relation to the distance

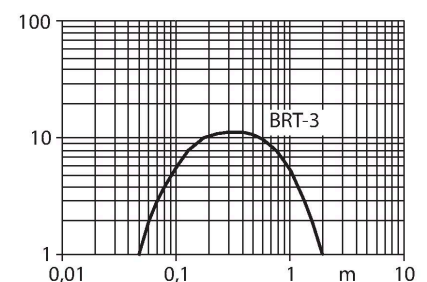

Technical data

Type	T18S2P6LPQ
ID	3045162
Optical data	
Function	Retroreflective Sensor
Operating mode	Polarized
Reflector included in delivery	no
Light type	Red polarized
Wavelength	680 nm
Range	50...2000 mm
Electrical data	
Operating voltage	10...30 VDC
No-load current	≤ 25 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	Connection programmable, PNP
Switching frequency	≤ 160 Hz
Readiness delay	≤ 100 ms
Response time typical	< 3 ms
Overcurrent release	> 220 mA
Mechanical data	
Design	Tube, T18
Dimensions	Ø 18 x 30 x 30 x 54 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Connector, M12 × 1, PVC
Number of cores	4

Technical data

Ambient temperature	-40...+70 °C
Protection class	IP67 IP69
Special features	Chemical-resistant Encapsulated Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED
Alarm display	LED yellow Flashing
Tests/approvals	
Approvals	CE, UL, CSA

Accessories

SMB1815SF3053279

Mounting bracket, PBT black, for PICO-GUARD points

Technical drawing of SMB1815SF mounting bracket. Dimensions: 11,7, 50,8, 43,2, 25,4, 36,1, 5, 15.

SMB18A3033200

Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread

Technical drawing of SMB18A mounting bracket. Dimensions: 30, 41, 26, 46, 6, 4,6, 18,5, 4,6, R 24,2.

SMB18FM3079421

mounting bracket, black, M22 x1.5 mm, male thread, female thread M18 x 1, for sensors with 18 mm thread

Technical drawing of SMB18FM mounting bracket. Dimensions: 11,7, 50,8, 43,2, 25,4, 36,1, 5, 15.


SMBAMS18P3073134

Mounting bracket, stainless steel, for sensors with 18 mm thread


Technical drawing of SMBAMS18P mounting bracket. Dimensions: 45, 23, 74, 17, 34, 2,6, 6,53, 19, 32, 18.

Accessories

Dimension drawing	Type	ID	
Technical drawing of RKC4.4T-2/TEL connection cable. Dimensions: 11,5, 42, 50, 14, 15, 14.	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

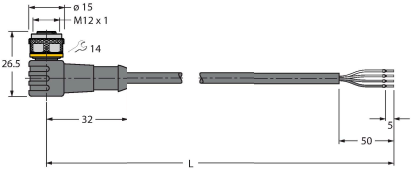Dimension drawing	Type	ID	
	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

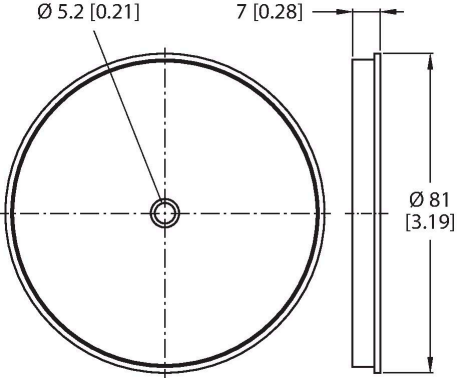Dimension drawing	Type	ID	
	BRT-3	3016164	Round reflector, reflection coefficient 1.0, material acrylic, ambient temperature -20...+60 °C