


T30SP6LP W/30


Photoelectric Sensor – Retroreflective Sensor with Polarizing Filter

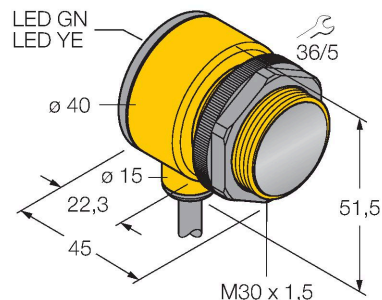

Features

- Cable, 2 m
- Protection class IP67
- Ambient temperature: -40...+70 °C
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram

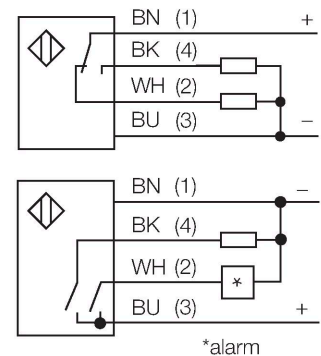


Technical data

Type	T30SP6LP W/30
ID	3033938
Optical data	
Function	Retroreflective Sensor
Operating mode	Polarized
Reflector included in delivery	no
Light type	Red polarized
Wavelength	680 nm
Range	50...6000 mm
Electrical data	
Operating voltage	10...30 VDC
No-load current	≤ 25 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Output function	Connection programmable, PNP
Switching frequency	≤ 160 Hz
Readiness delay	≤ 100 ms
Response time typical	< 3 ms
Overcurrent release	> 220 mA
Mechanical data	
Design	Tube, T30
Dimensions	Ø 30 x 45 x 40 x 51.5 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Cable, 9 m, PVC
Number of cores	4

Functional principle

Retro-reflective sensors incorporate emitter and receiver in a single compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors have a high function gain and good contrast performance. Further it is merely required to install and wire a single device. Excess gain curve
Excess gain in relation to the distance

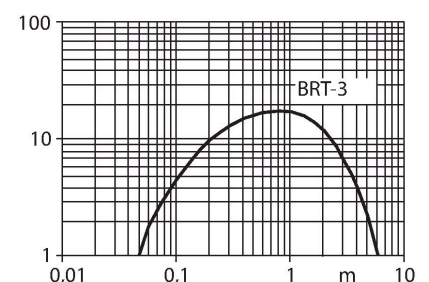

Technical data


Core cross-section	0.5 mm ²
Ambient temperature	-40...+70 °C
Protection class	IP69
Special features	Encapsulated Wash down
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED
Alarm display	LED yellow Flashing
Tests/approvals	
Approvals	CE, UL, CSA

Accessories

SMB1815SF

3053279


Mounting bracket, PBT black, for PICO-GUARD points



SMB30A

3032723


Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



SMB30FAM10

3011185


Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm



SMBAMS30P

3073135

Mounting bracket, stainless steel, for sensors with 30 mm thread



Accessories

Dimension drawing	Type	ID	
The image shows a technical drawing of a round reflector. It consists of two views: a front view on the left and a side view on the right. The front view is a circle with a central hole. A dimension line indicates the diameter of the central hole as Ø 5.2 [0.21]. A dimension line indicates the thickness of the reflector as 7 [0.28]. The side view shows the profile of the reflector, which is a thin disc. A dimension line indicates the outer diameter as Ø 81 [3.19].	BRT-3	3016164	Round reflector, reflection coefficient 1.0, material acrylic, ambient temperature -20...+60 °C