


VS25EVQ-69237


Photoelectric Sensor – Opposed Mode Sensor (Emitter) Miniature Sensor

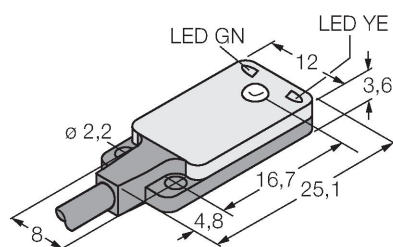

Features

- Cable with male end, M8 × 1, 3-pin, PVC, 150 mm
- Operating voltage: 10...30 VDC
- Ultra flat design

Wiring diagram




Technical data

Type	VS25EVQ-69237
ID	3069237
Optical data	
Function	Opposed mode sensor
Operating mode	Emitter
Light type	Red
Wavelength	660 nm
Range	0...1200 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 50 mA
No-load current	≤ 25 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Readiness delay	≤ 100 ms
Response time typical	< 1 ms
Mechanical data	
Design	Rectangular, VS2
Dimensions	4.7 x 12 x 25.1 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, MABS
Electrical connection	Cable with connector, M8 × 1, PVC
Ambient temperature	-20...+55 °C
Protection class	IP67
Power-on indication	LED, Green

Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremely high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions. Excess gain curve
Excess gain in relation to the distance

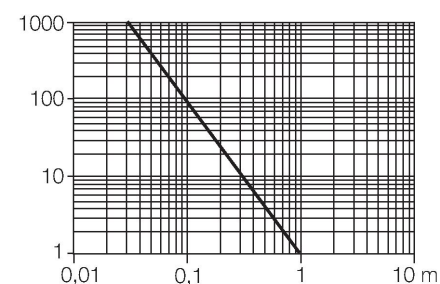

Technical data

Excess gain indication	LED
------------------------	-----

Tests/approvals

Approvals	CE
-----------	----

Accessories

SMBVS2RA	3058603
mounting bracket, straight	