


# RU20L-Q12S-UP8X-V1141

## Ultrasonic Sensor – Retroreflective Sensor

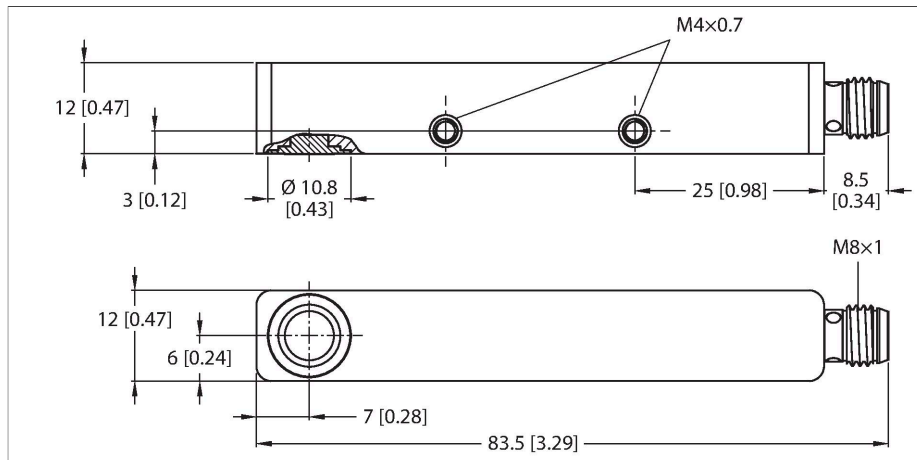


### Technical data

|                                |                        |
|--------------------------------|------------------------|
| Type                           | RU20L-Q12S-UP8X-V1141  |
| ID                             | 100005608              |
| <b>Ultrasonic data</b>         |                        |
| Function                       | Retroreflective Sensor |
| Range                          | 20...200 mm            |
| Resolution                     | 1 mm                   |
| Minimum switching range        | 5 mm                   |
| Ultrasound frequency           | 300 kHz                |
| Repeat accuracy                | ≤ 0.25 % of full scale |
| Temperature drift              | ± 1 % of full scale    |
| Linearity error                | ≤ ± 0.8 %              |
| Approach speed                 | ≤ 3 m/s                |
| Pass speed                     | ≤ 0.6 m/s              |
| <b>Electrical data</b>         |                        |
| Operating voltage              | 18...30 VDC            |
| Residual ripple                | 10 % U <sub>ss</sub>   |
| No-load current                | ≤ 40 mA                |
| Load resistance                | ≤ 1000 Ω               |
| Residual current               | ≤ 0.1 mA               |
| Response time typical          | < 100 ms               |
| Readiness delay                | ≤ 300 ms               |
| Communication protocol         | IO-Link                |
| Output function                | NO/NC, PNP             |
| Output 1                       | Switching output       |
| Switching frequency            | ≤ 20 Hz                |
| Hysteresis                     | ≤ 2 mm                 |
| Voltage drop at I <sub>o</sub> | ≤ 2 V                  |

### Features

- Smooth sonic transducer face
- Rectangular housing Q12S, potted
- Lateral light emission
- Connection via M8 × 1 male connector
- Teach range adjustable via connection cable or via IO-Link
- Blind zone: 2 cm
- Range: 20 cm
- Resolution: 1 mm
- Aperture angle of sonic cone: ±9 °
- Switching output, PNP
- NO/NC programmable
- IO-Link

### Wiring diagram

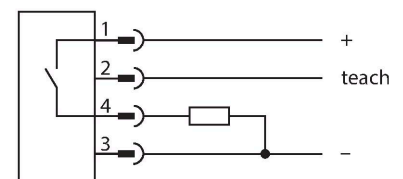

### Functional principle

Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function.


## Technical data

|                                      |                                                                         |
|--------------------------------------|-------------------------------------------------------------------------|
| Short-circuit protection             | yes                                                                     |
| Reverse polarity protection          | yes                                                                     |
| Setting option                       | Remote Teach<br>IO-Link                                                 |
| <b>IO-Link</b>                       |                                                                         |
| IO-Link specification                | V 1.1                                                                   |
| IO-Link port type                    | Class A                                                                 |
| Communication mode                   | COM 2 (38.4 kBaud)                                                      |
| Process data width                   | 16 bit                                                                  |
| Measured value information           | 15 bit                                                                  |
| Switchpoint information              | 1 bit                                                                   |
| Frame type                           | 2.2                                                                     |
| Minimum cycle time                   | 2 ms                                                                    |
| Function pin 4                       | IO-Link                                                                 |
| Function Pin 2                       | DI                                                                      |
| Maximum cable length                 | 20 m                                                                    |
| Profile support                      | Smart Sensor Profile                                                    |
| Included in the SIDI GSDML           | Yes                                                                     |
| <b>Mechanical data</b>               |                                                                         |
| Design                               | Rectangular, Q12                                                        |
| Radiation direction                  | side                                                                    |
| Dimensions                           | 82 x 12 x 12 mm                                                         |
| Housing material                     | Metal, AL, Anodized                                                     |
| Transducer material                  | Plastic, Epoxyd resin and PU foam                                       |
| Electrical connection                | Connector, M8 × 1, 4-wire                                               |
| Ambient temperature                  | -25...+70 °C                                                            |
| Storage temperature                  | -25...+70 °C                                                            |
| Pressure resistance                  | 0.5...5 bar                                                             |
| Protection class                     | IP67                                                                    |
| Switching state                      | LED, Yellow                                                             |
| <b>Tests/approvals</b>               |                                                                         |
| MTTF                                 | 578 years acc. to SN 29500 (Ed. 99) 40 °C                               |
| Declaration of conformity EN ISO/IEC | EN 60947-5-2                                                            |
| Shock test                           | Shock/vibration according to EN 60947-5-230 g, 11 ms/10...55 Hz, 1.0 mm |
| Approvals                            | CE<br>cULus                                                             |

The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-2, quadratic targets in a range of sizes (20 × 20 mm, 100 × 100 mm) and a round rod with a diameter of 27 mm are used.


Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

## Sonic Cone

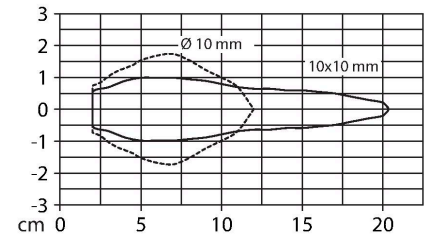

Mounting instructions

Mounting instructions/Description

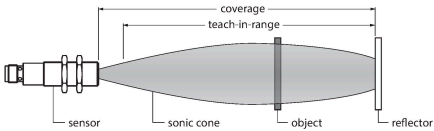

Teaching the reflector position  
The ultrasonic sensor features a switching output with a teachable switching range. The yellow LED indicates whether the sensor has detected the object.

A switching range is taught in. This must be within the detection range. In this operating mode, the taught reflector position is detected permanently without an object.

- Easy-Teach
- Stationary reflector within the detection range
  - Bridge pin 2 (BK) with the Ub for 2 seconds  
After a successful teach-in, the yellow LED flashes at 3 Hz and the sensor runs automatically in normal mode.
  - To invert the output function, bridge pin 2 against Ub for 2...7 seconds

LED response  
In normal operating mode, the LED signals the switching state of the sensor.

- Yellow: object between the sensor and reflector

Accessories

| Dimension drawing | Type                | ID      |                                                                                                                                                              |
|-------------------|---------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | PKG4M-2/TEL         | 6625061 | Connection cable, M8 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval                                       |
|                   | PKW4M-2/TEL         | 6625067 | Connection cable, M8 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval                                         |
|                   | PKG4M-2-RSC4.4T/TXL | 6627063 | Extension cable, M8 female connector, straight, 4-pin to M12 male connector, straight, 4-pin, cable length: 2 m, jacket material: PUR, black; cULus approval |

Accessories

| Dimension drawing | Type         | ID      |                                                                                                        |
|-------------------|--------------|---------|--------------------------------------------------------------------------------------------------------|
|                   | TBEN-S2-4IOL | 6814024 | Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A |

| Dimension drawing | Type           | ID      |                                         |
|-------------------|----------------|---------|-----------------------------------------|
|                   | USB-2-IOL-0002 | 6825482 | IO-Link Master with integrated USB port |