


IE5416



Inductive sensor

IEB31,5-BPKG/AS

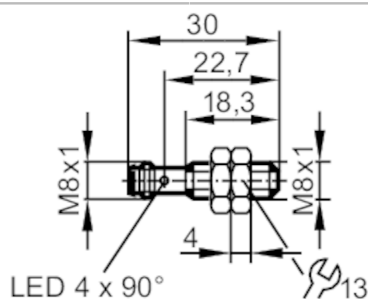

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	1.5
Housing	Threaded type
Dimensions [mm]	M8 x 1 / L = 30

Application

System	Increased sensing range
--------	-------------------------

Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	< 10
Protection class	III
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	3000
Short-circuit protection	yes
Overload protection	yes

Monitoring range

Sensing range [mm]	1.5
Real sensing range Sr [mm]	1.5 ± 10 %
Operating distance [mm]	0...1.2
Increased sensing range	yes

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2
Hysteresis [% of Sr]	< 15
Switch-point drift [% of Sr]	-10...10

IE5416



Inductive sensor

IEB31,5-BPKG/AS

Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 68
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[years]	1465
Embedded software included		yes
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	A017
	File number UL	E174191
Mechanical data		
Weight	[g]	13.2
Housing		Threaded type
Mounting		flush mountable
Dimensions	[mm]	M8 x 1 / L = 30
Thread designation		M8 x 1
Material		stainless steel (1.4404 / 316L); sensing face: LCP black; LED window: PPSU; lock nuts: stainless steel (1.4404 / 316L)
Tightening torque	[Nm]	A = 5 mm: 3 Nm; B = 5 Nm
Displays / operating elements		
Display	Switching status	4 LED, yellow
Accessories		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection - plug		
Connector: 1 x M8; coding: A		
		

IE5416



Inductive sensor

IEB31,5-BPKG/AS

Connection



Diagrams and graphs

Installation

