




Diffuse reflection sensors with background suppression

OGH-HNKG/US/V4A/CUBE/200MM

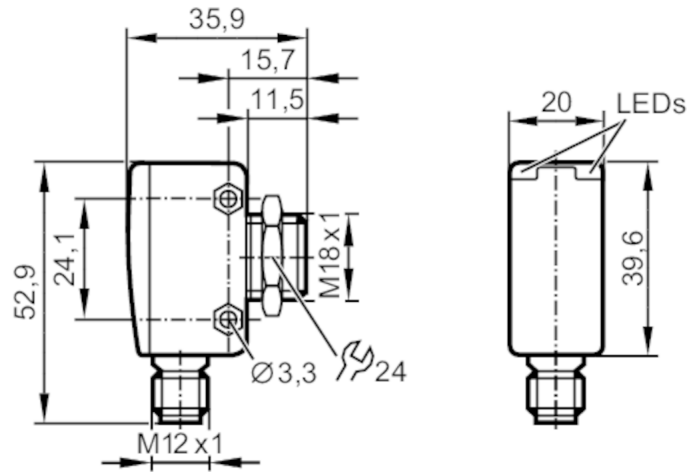

transmitter in lower lens
Receiver in upper lens



Product characteristics

Type of light	red light
Housing	rectangular with M18 thread

Application

System	Background suppression
Function principle	Diffuse reflection sensor

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	25
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	645

Outputs

Electrical design	NPN
Output function	light-on mode
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Range	[mm]	< 200; (white paper 200 x 200 mm 90 % remission)
-------	------	--



Diffuse reflection sensors with background suppression

OGH-HNKG/US/IV4A/CUBE/200MM

Range on white object (90 % remission) [mm]	< 200
Range on grey object (18 % remission) [mm]	< 200
Range on black object (6 % remission) [mm]	< 190
Range adjustable	no
Max. light spot diameter [mm]	13
Light spot dimensions refer to	at maximum range
Background suppression available	yes

Interfaces

Communication interface	IO-Link								
Transmission type	COM2 (38,4 kBaud)								
IO-Link revision	1.1								
SDCI standard	IEC 61131-9								
Profiles	Measuring Sensor, Identification and Diagnosis, Switching Signal Channel, Teach Channel								
SIO mode	yes								
Required master port class	A								
Min. process cycle time [ms]	10								
IO-Link process data (cyclical)	<table> <tr> <th>Function</th><th>bit length</th></tr> <tr> <td>process value</td><td>16</td></tr> <tr> <td>device status</td><td>4</td></tr> <tr> <td>binary switching information</td><td>1</td></tr> </table>	Function	bit length	process value	16	device status	4	binary switching information	1
Function	bit length								
process value	16								
device status	4								
binary switching information	1								
IO-Link functions (acyclical)	application specific tag; operating hours counter; switching cycles counter								
Supported DeviceIDs	<table> <tr> <th>Type of operation</th><th>DeviceID</th></tr> <tr> <td>default</td><td>1139</td></tr> </table>	Type of operation	DeviceID	default	1139				
Type of operation	DeviceID								
default	1139								
Note	For further information please see the IODD PDF file at "Downloads"								

Operating conditions

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...80
Protection	IP 65; IP 67; IP 68; IP 69K

Tests / approvals

EMC	EN 60947-5-2								
MTTF [years]	782								
UL approval	<table> <tr> <td>Ta</td><td>-25...80 °C</td></tr> <tr> <td>Enclosure type</td><td>Type 1</td></tr> <tr> <td>voltage supply</td><td>Class 2</td></tr> <tr> <td>File number UL</td><td>E174191</td></tr> </table>	Ta	-25...80 °C	Enclosure type	Type 1	voltage supply	Class 2	File number UL	E174191
Ta	-25...80 °C								
Enclosure type	Type 1								
voltage supply	Class 2								
File number UL	E174191								

Mechanical data

Weight [g]	74.5
Housing	rectangular with M18 thread
Dimensions [mm]	52.9 x 20 x 35.9
Thread designation	M18 x 1
Material	stainless steel (630/1.4542/17-4 PH); PEI
Lens material	PEI



Diffuse reflection sensors with background suppression

OGH-HNKG/US/V4A/CUBE/200MM

Lens alignment	Side sensing
----------------	--------------

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green

Accessories


Items supplied	lock nut: 1, stainless steel
----------------	------------------------------

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A



Connection

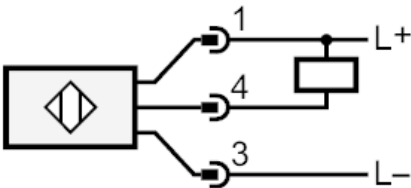

4 OUT / IO-Link



Diffuse reflection sensors with background suppression

OGH-HNKG/US/IV4A/CUBE/200MM

Other data

Repeatability / precision: 6 σ

	Repeatability of the measured values	
Abstand	white (90 % remission)	black (6 %...90 % remission)
20 mm	0.5 mm	1.0 mm
50 mm	0.8 mm	2.0 mm
100 mm	1.5 mm	4.5 mm
150 mm	3.0 mm	9.0 mm
200 mm	6.0 mm	20.0 mm
	Accuracy	
Abstand	white (90 % remission)	black (6 %...90 % remission)
20 mm	± 2.0 mm	± 2.5 mm
50 mm	± 3.5 mm	± 4.5 mm
100 mm	± 6.0 mm	± 7.5 mm
150 mm	± 7.5 mm	± 11.0 mm
200 mm	± 10.0 mm	± 17.0 mm
The values apply at		
Extraneous light on the object	< 10 klx	
constant ambient conditions	23 °C / 960 hPa	
minimum power-on time in minutes	10	