


OGS380



Through-beam sensor transmitter

OGS-00KG/US/V4A/CUBE

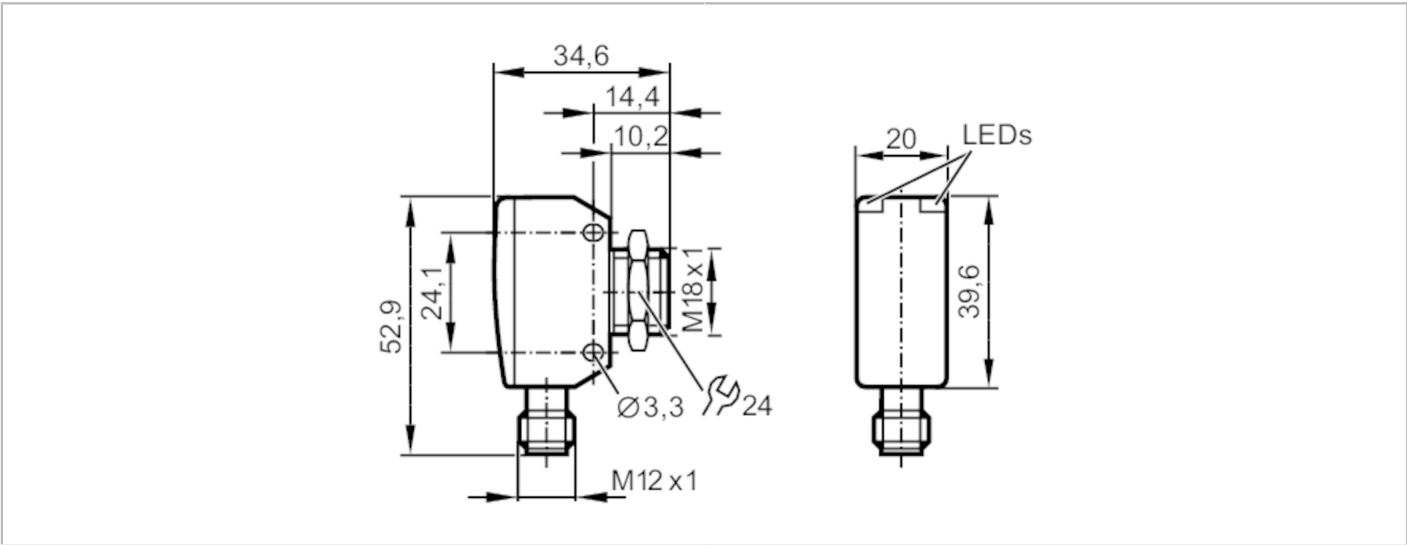

Product characteristics		
Type of light		red light
Housing		rectangular with M18 thread
Application		
Function principle		Through-beam sensor
Electrical data		
Operating voltage	[V]	10...30 DC
Rated insulation voltage	[V]	32
Current consumption	[mA]	17
Protection class		III
Reverse polarity protection		yes
Max. power-on delay time	[ms]	300
Type of light		red light
Wave length	[nm]	662
Monitoring range		
Transmitter / receiver		transmitter
Range	[m]	15
Max. light spot diameter	[mm]	800
Light spot dimensions refer to		at maximum range
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles		Smart Sensor: Device Identification, Device Diagnosis
SIO mode		no
Required master port class		A
Min. process cycle time	[ms]	2.5



Through-beam sensor transmitter

OGS-00KG/US/V4A/CUBE

IO-Link process data (cyclical)	Function	bit length
	device status	4
IO-Link functions (acyclical)	application specific tag; operating hours counter	
Supported DeviceIDs	Type of operation	DeviceID
	default	1135
Note	For further information please see the IODD PDF file at "Downloads"	

Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...80
Protection	IP 65; IP 67; IP 68; IP 69K	

Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[years]	1011
UL approval	Ta	-25...80 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E174191

Mechanical data		
Weight	[g]	78
Housing	rectangular with M18 thread	
Dimensions	[mm]	52.9 x 20 x 34.6
Thread designation	M18 x 1	
Material	stainless steel (630/1.4542/17-4 PH); PEI	
Lens material	PEI	
Lens alignment	Side sensing	

Displays / operating elements		
Display	Power	1 x LED, green

Accessories		
Items supplied	lock nut: 1	

Remarks		
Remarks	cULus - Class 2 source required	
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A



Through-beam sensor transmitter

OGS-00KG/US/V4A/CUBE

Connection



Diagrams and graphs

excess gain graph

