

PI1806



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ IP



- 1 alphanumeric display 4-digit
- 2 status LEDs
- 3 Programming button
- 4 G1 sealing cone external thread
Attention: The unit must only be installed in a process connection for G1 sealing cone.
The G1A sealing cone of the unit is only suited for adapters with metal end stop.
- 5 groove with sealing ring



ACS



CRN



EC 1935/2004

EHEDG

Tested

FCM



IO-Link

Reg31

UK

CA

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1			
Measuring range	-0.124...2.5 bar	-1.8...36.25 psi	-50...1004 inH2O	-12.4...250 kPa
Process connection	threaded connection G 1 external thread sealing cone Attention: The unit must only be installed in a process connection for G1 sealing cone.; The G1A sealing cone of the unit is only suited for adapters with metal end stop.			

Application

System	gold-plated contacts		
Application	flush mountable for the food and beverage industry		
Media	viscous media and liquids with suspended particles; liquids and gases		
Medium temperature [°C]	-25...150		
Min. bursting pressure	50 bar	725 psi	5000 MPa
Pressure rating	20 bar	290 psi	2000 kPa
Vacuum resistance	-1000 mbar		-0.1 MPa
Type of pressure	relative pressure; vacuum		
No dead space	yes		
MAWP (for applications according to CRN) [bar]	20		



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

Electrical data					
Min. insulation resistance	[MΩ]	100; (500 V DC)			
Protection class		III			
Reverse polarity protection		yes			
Integrated watchdog		yes			
2-wire					
Operating voltage	[V]	20...30 DC			
Current consumption	[mA]	3.5...21.5			
Power-on delay time	[s]	< 1			
3-wire					
Operating voltage	[V]	18...30 DC			
Current consumption	[mA]	5...45; (430 bei max. Laststrom)			
Power-on delay time	[s]	< 0.5			
Inputs / outputs					
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1			
Outputs					
Total number of outputs		2			
Output signal		switching signal; analog signal; IO-Link			
Electrical design		PNP/NPN			
Number of digital outputs		2			
Output function		normally open / closed; (configurable)			
Number of analog outputs		1			
Analog current output	[mA]	4...20, invertible; (scalable)			
Short-circuit protection		yes			
Type of short-circuit protection		yes (non-latching)			
Overload protection		yes			
2-wire					
Max. load	[Ω]	300			
3-wire					
Max. voltage drop switching output DC	[V]	2			
Permanent current rating of switching output DC	[mA]	100			
Switching frequency DC	[Hz]	125			
Max. load	[Ω]	(Ub - 10 V) / 21,5 mA; 650 Ω (Ub = 24 V)			
Measuring/setting range					
Measuring range		-0.124...2.5 bar	-1.8...36.25 psi	-50...1004 inH2O	-12.4...250 kPa
Set point SP		-0.12...2.5 bar	-1.74...36.26 psi	-48...1004 inH2O	-12...250 kPa
Reset point rP		-0.124...2.496 bar	-1.8...36.2 psi	-50...1002 inH2O	-12.4...249.6 kPa
Analog start point		-0.124...1.994 bar	-1.8...28.92 psi	-50...801 inH2O	-12.4...199.4 kPa
Analog end point		0.382...2.5 bar	5.54...36.26 psi	153...1004 inH2O	38.2...250 kPa
Min. difference between SP and rP		0.004 bar	0.06 psi	2 inH2O	0.4 kPa
In steps of		0.001 bar	0.01 psi	1 inH2O	0.1 kPa



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

Factory setting		SP1 = 0.625 bar	rP1 = 0.575 bar
		SP2 = 1.875 bar	rP2 = 1.825 bar
		ASP = 0.00 bar	AEP = 2.50 bar
		dAP = 2.00 s	dAA =2.00 s
Temperature monitoring			
Measuring range		-25...150 °C	-13...302 °F
Accuracy / deviations			
Switch point accuracy [% of the span]		< ± 0,2; (DIN EN IEC 62828-1; Turn down 1:1)	
Repeatability [% of the span]		< ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1)	
Characteristics deviation [% of the span]		< ± 0,2; (DIN IEC EN 62828-1 incl. zero point and span error, non-linearity, hysteresis; Turn down 1:1)	
Linearity deviation [% of the span]		< ± 0,15; (Turn down 1:1)	
Hysteresis deviation [% of the span]		< ± 0,15; (Turn down 1:1)	
Long-term stability [% of the span]		< ± 0,1; (Turn down 1:1; per year)	
Total deviation over temperature range		Temperature range	total deviation
		-25...15 °C	Characteristics deviation ± 0,05 % of the span / 10 K
		15...80 °C	Characteristics deviation
		80...150 °C	Characteristics deviation ± 0,1 % of the span / 10 K
Notes on the accuracy / deviation		for further details see section Diagrams and graphs	
Temperature monitoring			
Accuracy [K]		± 2,5+ (0,08 x (Umgebungstemperatur - Mediumtemperatur))	
Repeatability [K]		± 0,2	
Resolution [K]		0.2	
Reaction times			
Damping process value dAP [s]		0...99.99	
Damping for the analog output dAA [s]		0...99.99	
2-wire			
Step response time analog output [ms]		30	
3-wire			
Min. response time of switching output (dAP) [ms]		3	
Step response time analog output [ms]		7	
Temperature monitoring			
Dynamic response T05 / T09 [s]		< 35 / < 135; (DIN EN 60751 water ; > 0,9 m/s)	
Interfaces			
Communication interface		IO-Link	
Transmission type		COM2 (38,4 kBaud)	



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ IP

IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Function class	Description
	0x4000	Identification and Diagnosis
	0x800A	Measurement Data Channel (standard resolution)
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	5.6	
IO-Link resolution pressure [bar]	0.0001	
IO-Link resolution temperature [K]	0.2	
IO-Link process data (cyclical)	Function	bit length
	pressure	32
	temperature	32
	device status	4
	binary switching information	2
IO-Link functions (acyclical)	application specific tag; internal temperature; operating hours counter; switching cycles counter; Pressure peak counter	
Supported DeviceIDs	Type of operation	DeviceID
	default	1154

Operating conditions

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 67; IP 68; IP 69K

Tests / approvals

EMC	DIN EN 61326-1	
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]	214	
Note on approval	Factory certificate available as download at www.factory-certificate.ifm	
UL approval	UL approval number	J049
	File number UL	E174189

Mechanical data

Weight [g]	384.8
Housing	tubular
Dimensions [mm]	Ø 50 / L = 106
Material	stainless steel (1.4404 / 316L); FKM; PTFE; PBT; PEI; PFA
Materials (wetted parts)	ceramics (99.9 % Al ₂ O ₃); stainless steel (1.4435 / 316L); surface characteristics: Ra < 0,4 / Rz 4; PTFE
Min. pressure cycles	100 million
Tightening torque [Nm]	20
Process connection	threaded connection G 1 external thread sealing cone Attention: The unit must only be installed in a process connection for G1 sealing cone.; The G1A sealing cone of the unit is only suited for adapters with metal end stop.

PI1806



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

Displays / operating elements		
Display	Display unit	LED, green
	Switching status	LED, yellow
	Function display	alphanumeric display, 4-digit
	Measured values	alphanumeric display, 4-digit
Display unit	bar; psi; kPa; inH2O	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated		
		



Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

Connection



- 1 connection for 2-wire operation
 2 connection for 3-wire operation
 OUT1 Switching output / IO-Link
 OUT2 Switching output / analog output
 3 connection for IO-Link parameter setting (P = communication via IO-Link)
- Colors to DIN EN 60947-5-2
 Core colors
 BK = black
 BN = brown
 BU = blue
 WH = white




Flush pressure sensor with display

PI-2,5-REA01-MFRKG/US/ /P

Diagrams and graphs

ambient temperature influence on the accuracy

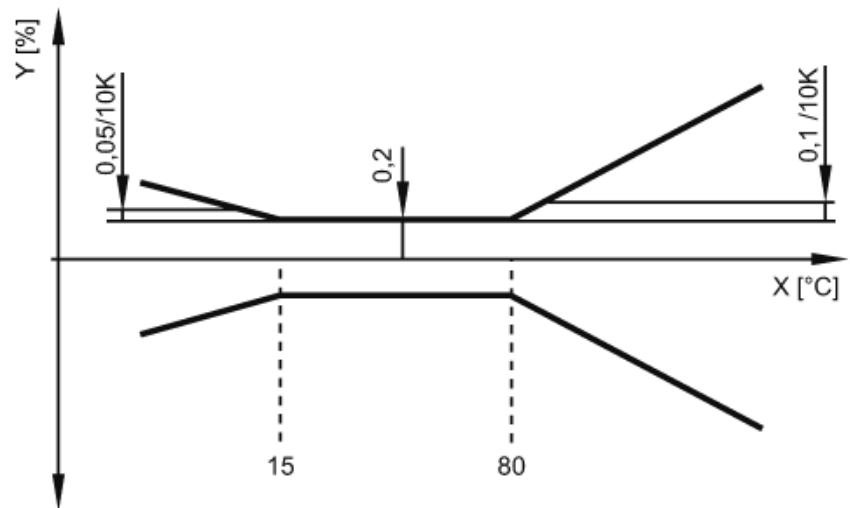

X temperature
Y total deviation