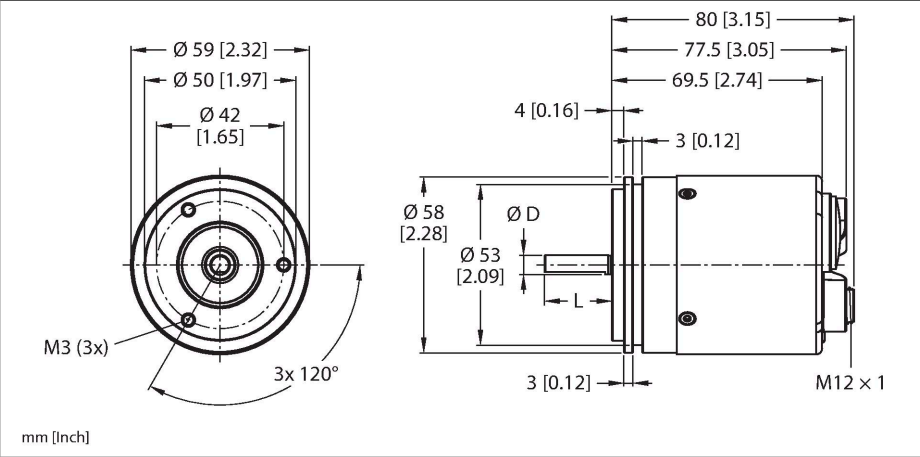


REM-105S6S-9E43B-B3M12

Absolute Rotary Encoder - Multiturn Industrial Line



Technical data

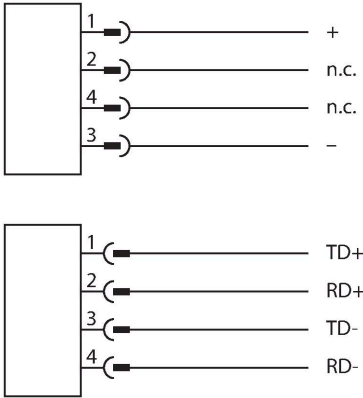
Type	REM-105S6S-9E43B-B3M12
ID	100046551
Measuring principle	Optical
General data	
Max. Rotational Speed	6000 rpm
Moment of inertia of the rotor	$3 \times 10^{-6} \text{ kgm}^2$
Output type	Absolute multiturn
Resolution singleturn	19 Bit
Resolution multiturn	24 Bit
	Singleturn scalable
Electrical data	
Operating voltage U_B	10...30 VDC
No-load current	$\leq 250 \text{ mA}$
Wire break/reverse polarity protection	yes
Communication protocol	PROFINET
Mechanical data	
Flange type	Synchro flange
Flange diameter	Ø 58 mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	6
Shaft Length L [mm]	10
Shaft material	Stainless steel
Housing material	Aluminium
Electrical connection	Connector, 3 x M12
Axial shaft load	40 N
Radial shaft load	80 N



Features

- Servo flange, Ø 58 mm
- Solid shaft, Ø 6 mm × 10 mm
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing side
- -40...+80 °C
- Max. 6000 rpm
- 10...30 VDC
- Profinet IO, RT and IRT up to 250 µs
- Encoder profile version 4.2
- Media Redundancy Protocol (MRP)
- Link Layer Discovery Protocol (LLDP)
- Simple Network Management Protocol (SNMP)
- Fast Startup (FSU)
- M12 × 3 connector, 4-pin
- Singleturn resolution scalable up to 19 bit, default 13 bit
- Multiturn resolution up to 24 bit, default 12 bit
- Total resolution scalable up to 43 bit, default 25 bit










Wiring diagram



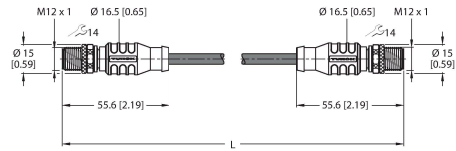
Technical data

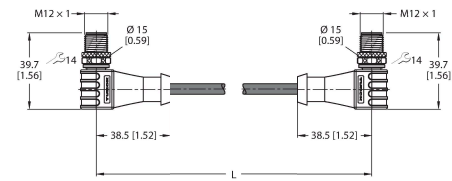
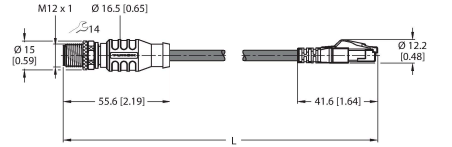
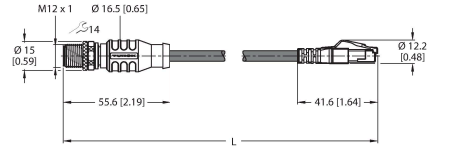
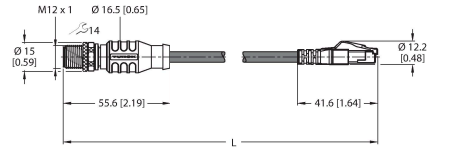
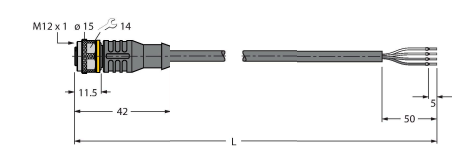
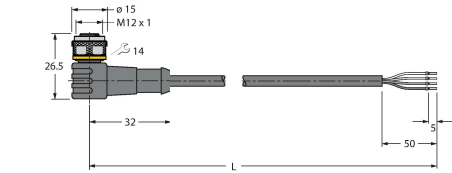
Environmental conditions	
Ambient temperature	-40...+80 °C
Vibration resistance (EN 60068-2-6)	10 g (100 m/s²), 55...2000 Hz
Shock resistance (EN 60068-2-27)	250 g (2500 m/s²), 6 ms
Protection class	IP67
Protection class shaft	IP67
MTTF	19 years

Accessories

RA-BC-20-06-06	100048777	RA-BC-20-06-08	100048778
	Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 6 mm		Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 8 mm
RA-BC-20-06-10	100048779	RA-BC-E-20-06-06	100048785
	Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm		Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 6 mm
RA-BC-E-20-06-10	100048786	RA-SDC-30-06-10	100048791
	Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm		Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 10 mm
RA-SDC-30-06-06	100048790	RA-HC-25-06-06	100048794
	Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 6 mm		Aluminum helix coupling Ø 25 mm; d1 = 6 mm, d2 = 6 mm
RA-HC-25-06-10	100048795		
	Aluminum helix coupling Ø 25 mm; d1 = 6 mm, d2 = 10 mm		

Accessories

Dimension drawing	Type	ID	
	RSSD-RSSD-4422-2M	6635150	Cable for Industrial Ethernet, M12 male connector, D-coded, straight to M12 male connector, D-coded, straight, cable length: 2 m, jacket material: PUR, green

Dimension drawing	Type	ID	
	WSSD-WSSD-4422-2M	6635188	Cable for Industrial Ethernet, M12 male connector, D-coded, angled to M12 male connector, D-coded, angled, cable length: 2 m, jacket material: PUR, green
	RSSD-RJ45S-4422-2M	6635170	Cable for Industrial Ethernet, M12 male connector, D-coded, straight to RJ45 male connector, straight, cable length: 2 m, jacket material: PUR, green
	RSSD-RJ45S-4422-7M	6635579	Cable for Industrial Ethernet, M12 male connector, D-coded, straight to RJ45 male connector, straight, cable length: 2 m, jacket material: PUR, green
	RSSD-RJ45S-4422-8M	6635538	Cable for Industrial Ethernet, M12 male connector, D-coded, straight to RJ45 male connector, straight, cable length: 2 m, jacket material: PUR, green
	RK4.4T-2/TXL	6625503	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PUR, black; cULus approval
	WKC4.4T-2/TXL	6625515	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PUR, black; cULus approval