


RI360P0-QR24M0-INCRX2-H1181

Contactless Encoder – Incremental: 1 ... 5000 ppr
Premium Line

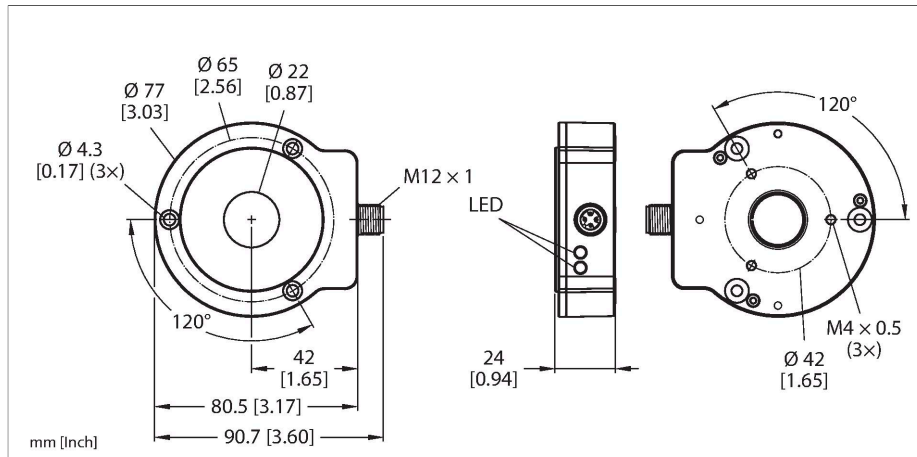



Technical data

Type	RI360P0-QR24M0-INCRX2-H1181
ID	1590910
Measuring principle	Inductive
General data	
Max. Rotational Speed	10000 rpm
	Determined with standardized construction, with a steel shaft Ø 20 mm, L = 50 mm and reducer Ø 20 mm
Starting torque shaft load (radial / axial)	not applicable, because of contactless measuring principle
Nominal distance	1.5 mm
Repeat accuracy	≤ 0.01 % of full scale
Linearity deviation	≤ 0.05 % f.s.
Temperature drift	≤ ± 0.003 %/K
Output type	Incremental
Resolution incremental	1024 ppr
Electrical data	
Operating voltage U_B	10...30 VDC
Ripple U_{ss}	≤ 10 % U_{Bmax}
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Wire break/reverse polarity protection	yes/yes (voltage supply)
Pulse frequency max.	200 kHz
Signal level high	min. $U_B - 2 V$
Signal level low	max. 2.0 V
Output function	8-pin, Push-Pull/HTL
Sample rate	1000 Hz

Features

- Compact, rugged housing
- Many mounting possibilities
- Status displayed via LED
- Immune to electromagnetic interference
- 1024 pulses per revolution (default)
- 360, 512, 1000, 1024, 2048, 2500, 3600, 4096, parametr. via Easy-Teach
- Free parametrization of the pulse number in the range from 1 to 5000 via PACTware™
- Position of z-track set via Easy-Teach
- Burst function, absolute angular position output incrementally per Easy-Teach pulse
- 10...30 VDC
- Male M12 x 1, 8-pin
- Push-pull A, B, Z, A (inverse), B (inverse)

Wiring diagram




Technical data

Current consumption	< 100 mA
Mechanical data	
Design	QR24
Dimensions	81 x 78 x 24 mm
Flange type	Flange without mounting element
Shaft Type	Hollow shaft
Shaft diameter D (mm)	6
	6.35
	9.525
	10
	12
	12.7
	14
	15.875
	19.05
	20
Housing material	Metal/plastic, ZnAlCu1/PBT-GF30-V0
Electrical connection	Connector, M12 × 1
Environmental conditions	
Ambient temperature	-25...+85 °C
	Acc. to UL approval to +70 °C
Vibration resistance	55 Hz (1 mm)
Vibration resistance (EN 60068-2-6)	20 g; 10...3000 Hz; 50 cycles; 3 axes
Shock resistance (EN 60068-2-27)	100 g; 11 ms ½ sine; 3 × each; 3 axes
Continuous shock resistance (EN 60068-2-29)	40 g; 6 ms ½ sine; 4000 × each; 3 axes
Protection class	IP68 IP69K
MTTF	138 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Measuring range display	LED, yellow, yellow flashing
Included in delivery	MT-QR24 mounting aid

Functional principle


The measuring principle of inductive angle sensors is based on oscillation circuit coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the angle of the positioning element. The rugged sensors are wear and maintenance-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

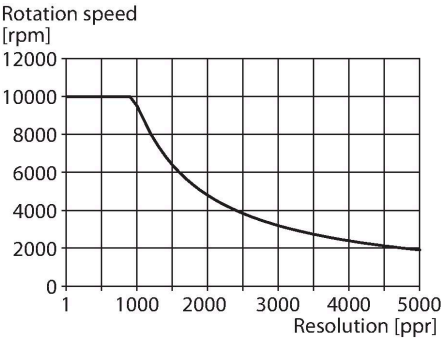


Mounting instructions

Mounting instructions/Description


A

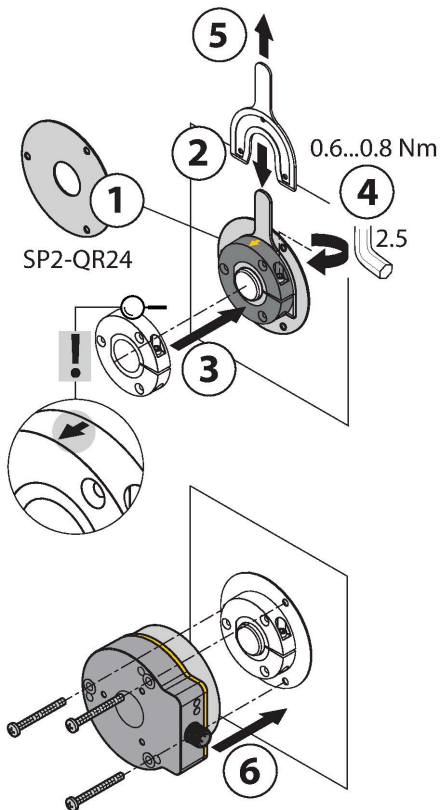


B

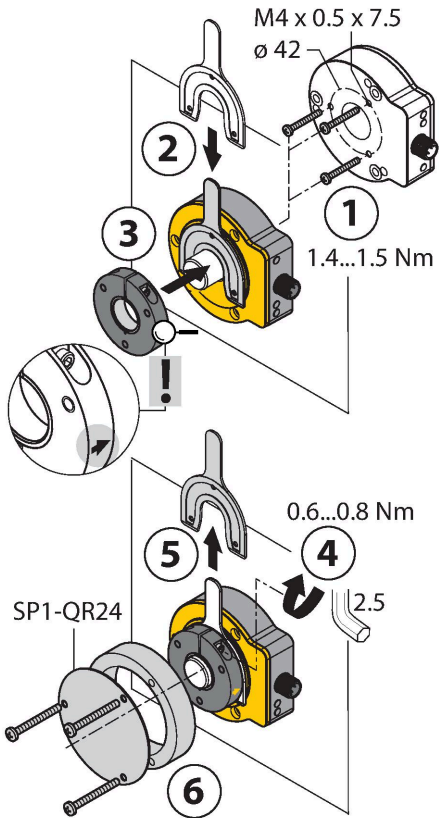

C

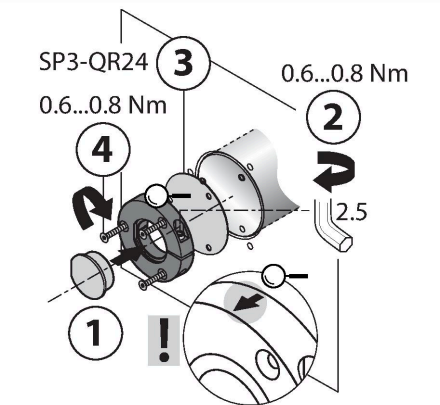

Default: 0°

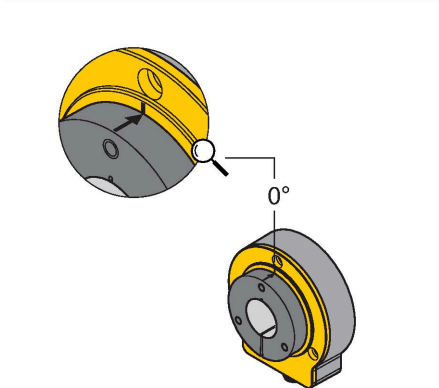

Extensive range of mounting accessories for easy adaptation to many different shaft diameters. Based on the functional principle of RLC coupling, the sensor operates absolutely wear-free and is immune to magnetized metal splinters and other interference fields. Wrong installation is hardly possible.

The adjacent figure shows the two separate units, sensor and positioning element.

Mounting option A:

First, interconnect positioning element and rotatable shaft. Then place the encoder above the rotating part in such a way that you get a tight and protected unit.

Mounting option B:

Push the encoder on the back site of the shaft and fasten it to the machine. Then clamp the positioning element to the shaft with the bracket.

Mounting option C:

If the positioning element is to be screwed on a rotating machine part, use the RA0-QR24 plug which is included in the delivery. Then tie up the bracket. Screw on the encoder via the three bores.

The separately arranged sensor and positioning element inhibit that compensating currents or damaging mechanical loads are transmitted via the shaft to the sensor. In addition, the encoder remains tight and highly protected during its entire lifespan. The accessories enclosed in the delivery help to mount encoder and positioning element at an optimal distance from each other. LEDs indicate the switching status.

Status display via LED

green steady:

Optimal sensor supply

yellow steady:

Positioning element has reached the end of the measuring range. This is indicated by a lower signal quality.

yellow flashing:

Positioning element is outside the measuring range.

off:

Positioning element is in the measuring range.

Individual Parameterization (Teaching with Positioning Element)

Jumper between teach input Pin 8	Gnd Pin 1	Ub Pin 2	LED
2 s	Z-track zero point teaching	One-time triggering of burst function	Status LED flashes then turns steady after 2 s
10 s	CCW rotation direction	CW rotation direction	After 10 s status LED flashes fast for 2 s
15 s	-	Factory setting (z-track, CW)	After 15 s power and status LED alternate

To avoid unintended teaching, keep pin 8 potential-free.

Preset Programming Mode (Teaching without Positioning Element)

Jumper between teach input Pin 8	Gnd Pin 1	Ub Pin 2	LED
	2 s Resolution setting mode active for 10 s	2 s Resolution setting mode active for 10 s	Status LED steady, flashes after 2 s as long as selection mode is active
360 pulses/360°	Start value		1 x flashing
512 pulses/360°	Press once		2 x flashing
1000 pulses/360°	Press twice		3 x flashing
1024 pulses/360°	Press three times		4 x flashing
2048 pulses/360°	Press four times		5 x flashing
2500 pulses/360°		Start value	1 x flashing
3600 pulses/360°		Press once	2 x flashing
4096 pulses/360°		Press twice	3 x flashing
5000 pulses/360°		Press three times	4 x flashing

To avoid unintended teaching, keep pin 8 potential-free.

Accessories

P1-RI-QR24 1590921



Positioning element, for Ø 20 mm shafts

P2-RI-QR24 1590922




Positioning element, for Ø 14 mm shafts

P3-RI-QR24 1590923




Positioning element, for Ø 12 mm shafts

P4-RI-QR24 1590924

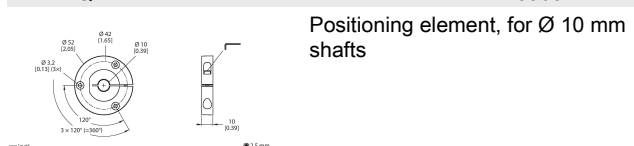

Positioning element, for Ø 10 mm shafts

P5-RI-QR24 1590925

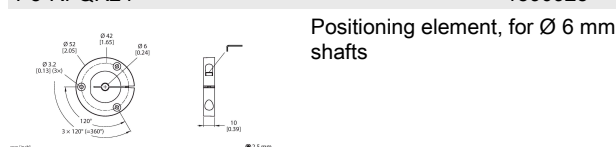


Positioning element, for Ø 6 mm shafts

P6-RI-QR24 1590926




Positioning element, for Ø 3/8" shafts

P7-RI-QR24 1590927

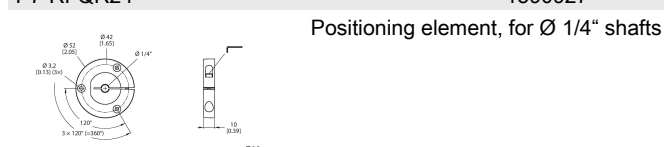


Positioning element, for Ø 1/4" shafts

P9-RI-QR24 1593012

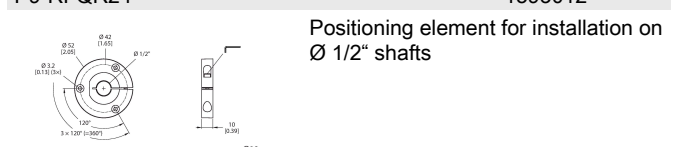


Positioning element for installation on Ø 1/2" shafts

P10-RI-QR24 1593013

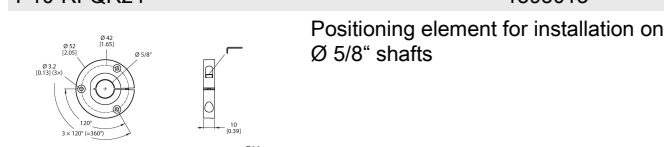

Positioning element for installation on Ø 5/8" shafts

P11-RI-QR24 1593014

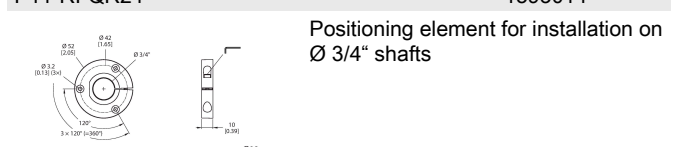


Positioning element for installation on Ø 3/4" shafts

P8-RI-QR24

1590916


Positioning element with blanking plug for large shafts



PE1-QR24

1590937


Positioning element without adapter sleeve



RA2-QR24

1590929


Adapter sleeve, for Ø 14 mm shafts



RA4-QR24

1590931


Adapter sleeve, for Ø 10 mm shafts



RA6-QR24

1590933


Adapter sleeve, for Ø 3/8" shafts



RA9-QR24

1590960


Adapter sleeve, for Ø 1/2" shafts



RA11-QR24

1590962


Adapter sleeve, for Ø 3/4" shafts



SP1-QR24

1590938


Shield plate Ø 74 mm, aluminium



SP3-QR24

1590958


Shield plate Ø 52 mm, aluminium



M1-QR24

1590920


Aluminum protecting ring, for inductive encoders RI-QR24



RA1-QR24

1590928


Adapter sleeve, for Ø 20 mm shafts



RA3-QR24

1590930


Adapter sleeve, for Ø 12 mm shafts



RA5-QR24

1590932


Adapter sleeve, for Ø 6 mm shafts



RA7-QR24

1590934


Adapter sleeve, for Ø 1/4" shafts



RA10-QR24

1590961


Adapter sleeve, for Ø 5/8" shafts



RA8-QR24

1590959


Plug for mounting option C



SP2-QR24

1590939


Shield plate Ø 74 mm, aluminium, with borehole for shaft feedthrough





MT-QR24

1590935


Mounting aid for optimal alignment of positioning element



Accessories

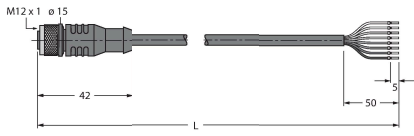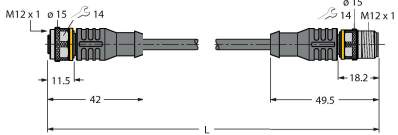Dimension drawing	Type	ID	
	RKC8T-2/TXL	6625142	Connection cable, M12 female connector, straight, 8-pin, cable length: 2 m, jacket material: PUR, black; cULus approval
	E-RKC 8T-264-2	U-04781	Connection cable, female M12, straight, 8-pin (twisted pairs), shielded, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
	RKC8.302T-1.5-RSC4T/TXL320	6625003	Adapter cable to connect sensor to USB-2-IOL-0002 programming unit; M12 female connector, straight, 8-pin to M12 male connector, straight, 3-pin; cable length: 1.5 m; jacket material: PUR, black; cULus approved; RoHS compliant; protection class IP67

Accessories

Dimension drawing	Type	ID	
	USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port

Dimension drawing	Type	ID	
	TX2-Q20L60	6967117	Teach adapter for inductive encoders with 8-pin male M12 x 1, for simple programming via Easy Teach

